



A10 track spot



2024 | This sedcard was printed on paper from sustainable forestry.

AIO

track spot

COLOUR

black | white | customized

FEATURES

- + different reflectors in one housing \varnothing 70 mm | h 140 mm
- + LED also in tunable white or with CRI 97+
- + other configurations feasible

VARIANTS

AIO .ohy	2x 5°	2x 10°	soft cut-off	OHY hybrid optics
AIO .rmj	2x 25°	soft cut-off	RMJ reflector	
AIO .cl4	2x 30°	exact cut-off	CL4 reflector	

PERFORMANCE

AIO .ohy	2x 5°	4000 K	12 W	1060 lm	CRI 90+
AIO .ohy	2x 10°	2700-5700 K	11 W	810 lm	CRI 90+
AIO .rmj	2x 25°	2700-5700 K	11 W	810 lm	CRI 90+
AIO .cl4	2x 30°	3000 K	18 W	2070 lm	CRI 97+
AIO .cl4	2x 30°	4000 K	18 W	2250 lm	CRI 97+

CONTROL PICO lightnode | Dali | Casambi

PROTECTION IP 20

MOUNTING Power rail

Sedcard digital



ID 4586

Leuchten + Metall Technik GmbH

📍 Dieselstr. 5, D-91161 Hilpoltstein

🌐 <https://lmtgmbh.de>

📱 lmtgmbh


📷 lmt.gmbh



AIO black



AIO white

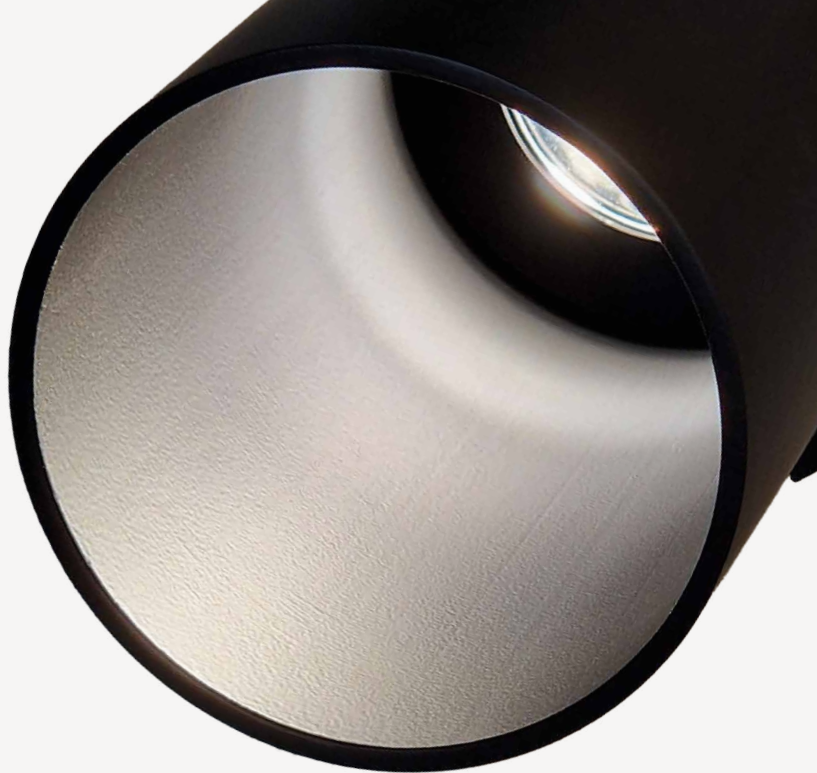

CERO downlight spot



2024 | This sedcard was printed on paper from sustainable forestry.

CERO

downlight
spot

COLOUR

black | white | customized

FEATURES

- + with bracket for lamella or strip ceilings
- + for humid environments
- + narrow beam

LIGHT COMPONENTS

LGL glass lense 2x 5°
LED 4000 K | CRI 90

PERFORMANCE

10 W | 1000 lm

PROTECTION

IP 65

Sedcard digital



ID 3745-1400


Leuchten + Metall Technik GmbH

📍 Dieselstr. 5, D-91161 Hilpoltstein

🌐 <https://lmtgmbh.de>

📱 [lmtgmbh](https://www.instagram.com/lmtgmbh)

📷 [lmtgmbh](https://www.instagram.com/lmtgmbh)



CERO



:

CEQA downlight | black box

CEQA

downlight
black box

COLOUR

black | customized

FEATURES

- + especially for lamella ceilings
- + customizable with various reflector types
- + customizable colour temperature or tunable white
- + also for loudspeakers or CCTV

LIGHT COMPONENTS

- + CL reflectors square 2x 30° | 2x 45° (hard cut-off)
- + CL reflectors round 2x 30° | 2x 45° (hard cut-off)
- + RMJ reflectors 2x 25° | 2x 35° | 2x 45° | 90°+60°
- + OHY hybrid optics 2x 3° | 2x 4,7° | 2x 6,8° | 2x 13,3°
- + LFO focal lenses 2x 20° | 2x 38°

PERFORMANCE

- + CL 12 W | 1500 lm 3000 K
- + RMJ 12 W | 1140 lm 2700-6500 K
- + OHY 9 W | 660 - 800 lm 3000 | 4000 | 2700-5700 K
- + LFO 6 W | 620 - 880 lm 3000 | 4000 | 2700-5700 K

PROTECTION IP 20

Seedcard digital



ID 3745-2500

Leuchten + Metall Technik GmbH

📍 Dieselstr. 5, D-91161 Hilpoltstein

🌐 <https://lmtgmbh.de>

📘 lmtgmbh

📧 lmt.gmbh



CEQA + CL

© 2024 | This seedcard was generated by the manufacturer's software.



EY! mix downlight | downwall

EY! mix

downlight
downwall

COLOUR

white | black

PERFORMANCE 12 W | 1140 lm

VARIANTS

+ EY! mix .f : flush recessed | h= 0 mm | \varnothing 60 mm

+ EY! mix .e: recessed | h= 2 mm | \varnothing 90 mm

+ EY! mix .h: half-recessed | h= 60 mm | \varnothing 90 mm

+ EY! mix .a: surface-mounted | h= 190 mm | \varnothing 90 mm

LIGHT COMPONENTS

RMJ reflectors symmetrical | asymmetrical

COB 2700 - 6500 K (tunable white) | CRI 90

LIGHT DISTRIBUTION

symmetrical downlight 2x 25° | 2x 35° | 2x 45°

asymmetrical downwall 90°+60°

UGR < 19

CONTROL DALI

PROTECTION IP 20

Sedcard digital



ID 4538

Leuchten + Metall Technik GmbH

📍 Dieselstr. 5, D-91161 Hilpoltstein

🌐 <https://lmtgmbh.de>

📘 lmtgmbh

📷 lmt.gmbh




EY! mix .f



EY! mix .e



EY! mix .h



EY! mix .a



NAU downlight | downwall



2024 | This sedcard was printed on paper from sustainable forestry.

NAU

downlight downwall

COLOUR

white RAL 9003
black RAL 9005

VARIANTS

+ NAU .e: recessed \varnothing 128 mm | h 187 mm | 30 W | 2200 lm
+ NAU .h: half-recessed \varnothing 130 mm | h 187 mm | 27 W | 1700 lm

LIGHT COMPONENTS

RJR reflectors symmetrical | asymmetrical
COB nichia optisolis 3000 K (solar white) | CRI 98+

LIGHT DISTRIBUTION

symmetrical 2x 25° | 2x 35° | 2x 42°
asymmetrical 90°+60°

CONTROL

Dali

PROTECTION

IP 20

Sedcard digital



ID 3907-310 | -2100


Leuchten + Metall Technik GmbH

📍 Dieselstr. 5, D-91161 Hilpoltstein


🌐 <https://lmtgmbh.de>

📞 lmtgmbh

📧 lmt.gmbh



NAU .h



NAU .e



SCOPE downlights

SCOPE

downlights

COLOUR white RAL 9003 | customized

VARIANTS

- + SCOPE cone round housing | round reflector
- + SCOPE iris round housing | round reflector | backlight
- + SCOPE pupil round housing | square reflector | backlight
- + SCOPE box square housing | square reflector
- + SCOPE rim square housing | square reflector | backlight

LIGHT COMPONENTS

direct light:

CL reflector square + round 2x 30° | 2x 45° | 2x 60°
2700-6500 K tw | 30 W | 2500 lm | CRI 93
LED 3000 K | up to 30 W | up to 4500 lm | CRI 90+
LED 4000 K | up to 30 W | up to 4800 lm | CRI 90+

backlight:

satinised diffuser pane
LED 4000 K | up to 8,5 W | up to 520 lm

PROTECTION IP 20 | IP 65

MOUNTING

- box.rim | cone.iris | pupil
- + SCOPE .e recessed mounted □ 200 | ø 140 | ø 160 mm
- + SCOPE .a surface mounted □ 200 | ø 200 | ø 200 mm
- + SCOPE .p pendant luminaire □ 200 | ø 200 | ø 200 mm

Sedcard digital



ID 2580 | 3745

Leuchten + Metall Technik GmbH

📍 Dieselstr. 5, D-91161 Hilpoltstein

🌐 <https://lmtgmbh.de>

📞 lmtgmbh


📧 lmtgmbh



SCOPE .e



SCOPE .a



SCOPE .p



SCOPE + sanitizing downlight



2024 This sedcard was printed on paper from sustainable forestry.

SCOPE + sanitizing downlight

COLOUR

white RAL 9003 | customized

VARIANTS

SCOPE rim .e + recessed □ 140 mm | h 182 mm

SCOPE rim .a + surface mounted □ 200 mm | h 107 mm

LIGHT COMPONENTS

center light:

CL reflector square 2x 30° | 2x 45° | 2x 60°

3000 K | 25 W | 2900 lm | CRI 90+

4000 K | 25 W | 3100 lm | CRI 90+

sanitizing light:

400-420 nm (blue-violet) | 10 W

FEATURES

- + kills germs like viruses + bacteria, fungi, molds, spores
- + sanitizes surfaces and air
- + safe for humans and animals: UV free

CONTROL Dali

PROTECTION IP 20

Sedcard digital



ID 4207


Leuchten + Metall Technik GmbH

📍 Dieselstr. 5, D-91161 Hilpoltstein

🌐 <https://lmtgmbh.de>

📱 lmtgmbh

📷 lmt.gmbh



SCOPE rim .e +



SCOPE rim .a +



LYSO linear






2024 | This sedcard was printed on paper from sustainable forestry.

LYSO linear



LYSO line light strip
satinized diffuser
3000 K | 4000 K | CRI 90+
23 W/m | 2500 lm/m
□ 40 x 60 mm | black anodized



LYSO office downlight
RDB-D reflectors symmetrical
2700-5700 K | CRI 90+
28 W/m | 2670 lm/m
4000 K | CRI 90+
23 W/m | 2580 lm/m
□ 55 x 60 mm | black anodized



LYSO slope wallwasher
RDB reflectors asymmetrical
4000 K | 2700-5700 K | CRI 90+
23 W/m | 2500 lm/m
□ 40 x 60 mm | black anodized



LYSO bar wall luminaire
RDB reflectors | direct/indirect
4000 K | CRI 90+
20 W | 1000 lm + 1000 lm
□ 100 x 60 x 325 mm | black anod.



LYSO cube wall luminaire
RDB reflectors | direct/indirect
4000 K | CRI 90+
4 W | 200 lm + 200 lm
□ 100 x 60 x 100 mm | black anod.

Sedcard digital



ID 2570 | 2632

Leuchten + Metall Technik GmbH

📍 Dieselstr. 5, D-91161 Hilpoltstein

🌐 <https://lmtgmbh.de>


📞 lmtgmbh

📧 lmt.gmbh





FILO linear





2024 | This sedcard was printed on paper from sustainable forestry.

FILO linear

COLOUR

black anodized

MOUNTING

Pendant | Surface mounted

FILO office downlight

RDB-D reflectors

symmetrical 2x 43°

indirect component on request


+ 2700-5700 K | CRI 90+

28 W/m | 2670 lm/m

+ 4000 K | CRI 90+

23 W/m | 2580 lm/m

□ 50 x 60 mm edge



FILO slope wallwasher

RDB reflectors

asymmetrical 85°


+ 2700-5700 K | CRI 90+

28 W/m | 2670 lm/m

+ 4000 K | CRI 90+

23 W/m | 2580 lm/m

□ 40 x 60 mm edge



Sedcard digital



ID 2570 | 4247

Leuchten + Metall Technik GmbH


📍 Dieselstr. 5, D-91161 Hilpoltstein

🌐 <https://lmtgmbh.de>

📞 lmtgmbh

📧 lmt.gmbh



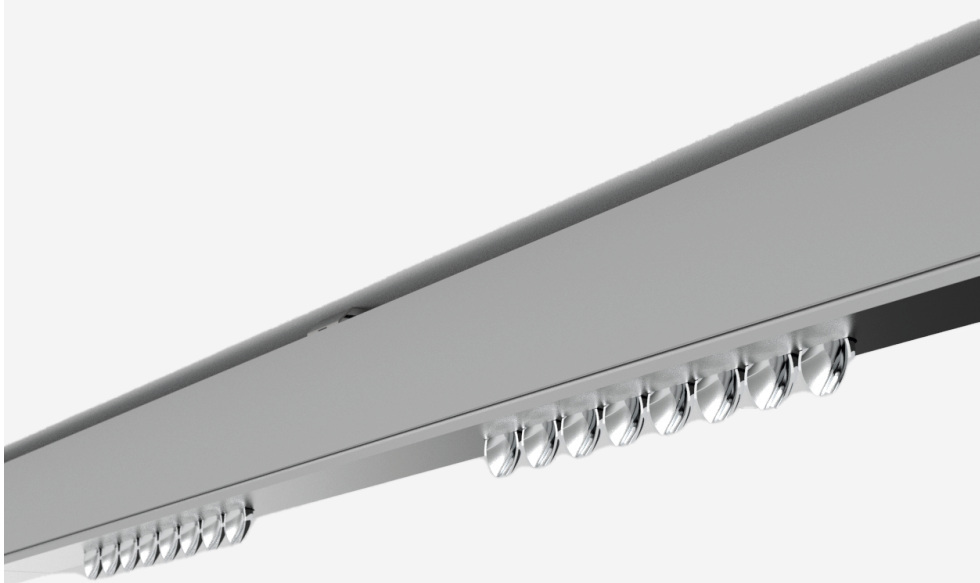

MINI linear





2024 | This sedcard was printed on paper from sustainable forestry.

MINI linear



MINI claro .m

linear luminaire | microprism diffuser

23 W/m

2500 lm/m

3000 K | 4000 K

CRI 90+

□ 32 x 48 mm



MINI linea

linear luminaire | satinized diffuser

23 W/m

2500 lm/m

3000 K | 4000 K

CRI 90+

□ 32 x 48 mm



MINI pyca

linear downlight | LFO lenses

24 W/m

2200 lm/m

4000 K | 2700-5700 K (tunable white)

CRI 90+

□ 32 x 48 mm



MINI lado

linear wallwasher | MDBW reflectors

~ 40 W/m

~ 3500 lm/m

3000 K | 4000 K

CRI 90+

□ 32 x 48 mm

Sedcard digital



ID 3078

Leuchten + Metall Technik GmbH

📍 Dieselstr. 5, D-91161 Hilpoltstein

🌐 <https://lmtgmbh.de>

📞 lmtgmbh

📧 lmt.gmbh





ASH wallgrazer



2024 | This sedcard was printed on paper from sustainable forestry.

ASH

wallgrazer

COLOUR

black | white | customized

FEATURES

- + narrow beam
- + customizable colour of light and housing
- + for humid environments

VARIANTS

- + 600 mm | 18 W | 2500 lm . 3000 K | 3000 lm . 4000 K
- + 900 mm | 26 W | 3700 lm . 3000 K | 4500 lm . 4000 K
- + 1200 mm | 36 W | 5000 lm . 3000 K | 6000 lm . 4000 K

LIGHT COMPONENTS

asymmetrical channel reflector
black anti-glare louvre
LED 3000 K . CRI 90 | 4000 K . CRI 80

PROTECTION IP 65

DIMENSIONS W 130 | H 106 mm

MOUNTING recessed mounting

Sedcard digital



ID 3745-1000

Leuchten + Metall Technik GmbH

📍 Dieselstr. 5, D-91161 Hilpoltstein

🌐 <https://lmtgmbh.de>

📱 lmtgmbh


📷 lmt.gmbh



ASH 3000 K



ASH 4000 K



HOLI linear luminaire



2024 | This sedcard was printed on paper from sustainable forestry.

HOLI linear luminaire

COLOUR

Housing: customized in RAL or DB colours

Diffusors: customized in white or colour

Light: 3000 K + 4000 K | CRI 90+

FEATURES

- + Direct light with louvre
- + Ambient light with diffusors
- + Customized colour of diffusors and housing
- + Two different light colours in the direct component

VARIANTS

+ 890 mm | 24 W | 1440 + 1530 lm | 3000 + 4000 K

+ 1190 mm | 32 W | 1830 + 1920 lm | 3000 + 4000 K

LIGHT DISTRIBUTION

direct light: symmetrical 2x 60° | others on request

ambient light: diffuse

PROTECTION IP 65 | SK III

DIMENSIONS W 234 . H 66 mm . L 890 mm | 1190 mm

MOUNTING surface mounting | recessed mounting

Sedcard digital



ID 4410-400

Leuchten + Metall Technik GmbH

📍 Dieselstr. 5, D-91161 Hilpoltstein

🌐 <https://lmtgmbh.de>

📘 lmtgmbh



📷 lmt.gmbh



HOLI white



HOLI colour



VARYO III linear luminaire



2024 | This sedcard was printed on paper from sustainable forestry.

VARYO III

linear
luminaire

COLOUR

customized RAL and DB colours

VARIANTS

2700-5700 K tw | reflector + louver:

- + 600 mm | 35 W | 3500 lm @ 4000 K | CRI 90+
- + 1200 mm | 70 W | 7000 lm @ 4000 K | CRI 90+

3000 K | 4000 K | satinised diffuser:

- + 600mm | 23 W | 2800 lm | CRI 90+
- + 1200mm | 46 W | 5600 lm | CRI 90+

4000 K | satinised diffuser | **DB conform:**

- + 600mm | 23 W | 2800 lm | CRI 90+ | DB conform
- + 1200mm | 37 W | 4100 lm | CRI 90+ | DB conform

LIGHT DISTRIBUTION symmetrical wide | asymmetrical

CONTROL DALI DT8/DT6 | 1-10 V | DMX | Dip-Switch

PROTECTION IP 54 | IP 65

DIMENSIONS W 198 | H 79 mm

MOUNTING integrated in media channel | surface mounted


CERTIFICATE 

Sedcard digital



ID 2542

Leuchten + Metall Technik GmbH

 Dieselstr. 5, D-91161 Hilpoltstein

 <https://lmtgmbh.de>

 lmtgmbh

 lmt.gmbh



VARYO III



VARYO III .DB



2590 LED handrail



2024 | This sedcard was printed on paper from sustainable forestry.

2590

LED handrail

SURFACE

polished | customized

FEATURES

- + made of stainless steel
- + operating devices integrated
- + feeding 230 V
- + 2 different asymmetrical light inserts, flush mounted

LIGHT INSERTS

+ LINE .t

linear | flat + deep (stairs | sidewalks)
8,25 W | 24 V | 980 lm | 4000 K | L 400 mm

+ LADO endo

dot | flat + wide (corridors | nightlight)
MDBW 2 W | 24 V | 184 lm | 4000 K | L 95 mm

PROTECTION

IP 54

DIMENSIONS

ø 48,3 mm

Sedcard digital



ID 2590 | 3040

Leuchten + Metall Technik GmbH

📍 Dieselstr. 5, D-91161 Hilpoltstein

🌐 <https://lmtgmbh.de>

📘 lmtgmbh


📷 lmt.gmbh



2590 + LINE .t



2590 + LADO endo



YECTO projectors | uplights

YECTO projectors uplights



YECTO 1.R uplight

2x 6° | 2x 13° | asymm. ø 114 mm
3000 K | 11 W | 780 lm | CRI 90+ | h 123 mm
4000 K | 11 W | 840 lm | CRI 90+ | h 123 mm
2700-5700 K | 11 W | 810 lm | CRI 90+ | h 178 mm



YECTO one projector

2x 6° | 2x 13° h 121 mm | ø 100 mm
2700-5700 K | 11 W | 810 lm | CRI 90+
2700 K + col. | 4-8 W | 2700 K: 160 lm @ 700 mA
+ orange: 50 lm @ 500 mA + red: 350 mW @ 500 mA



YECTO 3.R projector

2x 6° | 2x 13° h 110 mm | ø 195 mm
3000 K | 33 W | 2340 lm | CRI 90+ | h 123 mm
4000 K | 33 W | 2520 lm | CRI 90+ | h 123 mm
2700-5700 K | 33 W | 2430 lm | CRI 90+ | h 178 mm



YECTO 7.R projector

2x 4,7° | 2x 13,3° h 110 mm | ø 249 mm
3000 K | 77 W | 5460 lm | CRI 90+
4000 K | 77 W | 5880 lm | CRI 90+



YECTO 18.R projector

2x 4,7° h 109 mm | ø 377 mm
3000 K | 187 W | 14070 lm | CRI 90+
4000 K | 187 W | 15150 lm | CRI 90+

2024 | This Sedcard was printed on paper from sustainable forestry.

Sedcard digital



ID 2558 | 2577

Leuchten + Metall Technik GmbH

📍 Dieselstr. 5, D-91161 Hilpoltstein

🌐 <https://lmtgmbh.de>

📞 lmtgmbh

📧 lmt.gmbh





PICO
lightnode



because IoT requires openness

LIGHT **ONLY WHEN** IT IS NEEDED
LIGHT **ONLY WHERE** IT IS NEEDED
LIGHT **EXACTLY AS** IT IS NEEDED

USER FRIENDLY

- + intelligent sensors for motion and ambient light level
- + circadian illumination by bespoke default settings
- + manual override possibilities
- + easy-to-use web interface for manual control
- + automatical reset at the end of the day

OPERATOR FRIENDLY

- + longer lifespan of the luminaires
- + less energy consumption
- + potential for monetary savings
- + cloud-based or offline operable

INSTALLATOR FRIENDLY

- + no need for complex centralized controllers
- + no need for data wiring
- + luminaire-integrated control modules
- + use of existing WIFI infrastructure possible
- + hardware designed to dock different systems
- + software connects to others by default web APIs
- + no programming skills needed

You decide which of your data is used and how it is used!
You retain control over your light!

Learn more



ID 3919

Leuchten + Metall Technik GmbH

📍 Dieselstr. 5, D-91161 Hilpoltstein

🌐 <https://lmtgmbh.de>

📞 lmtgmbh

📷 lmt.gmbh





ReFILL charging pole



ReFILL charging pole

COLOUR

black-silver | customized

VARIANTS

single charger: 1x 11 kW AC | 1x 22 kW AC | plug type 2

twin charger: 2x 11 kW AC | 2x 22 kW AC | plug type 2

CLEARANCE MANAGEMENT

optional

LIGHT INSERT

optional: 4 W | 3000 K

PROTECTION

IP 65 | IK 08

DIMENSIONS

d 360 mm | w 406 mm | h 1333 mm

Sedcard digital



ID 4003

Leuchten + Metall Technik GmbH

📍 Dieselstr. 5, D-91161 Hilpoltstein

🌐 <https://lmtgmbh.de>


📘 lmtgmbh

📷 lmt.gmbh



2024 | This sedcard was printed on paper from sustainable forestry.





CEISY ceiling system



CEISY ceiling system

COLOUR

white RAL 9003 | customized

FEATURES

- + straight or curved shapes
- + rigid, non-deforming lamellae
- + with screw channel on top
- + easily removable lamella packages

MATERIAL

lamellae: extruded aluminium profile
supports: stainless steel

DIMENSIONS

lamella W 10 mm . H 40 mm
spacing 60 mm

LIGHT INSERTS

- + CERO cylindrical spotlight with OHY reflector or LGL lens
- + CEQA quadratic downlight with different reflectors
- + PYCA single point or linear downlight with LFO lenses
- + MINI linear luminaire with diffuser or microprism cover
- + FILO linear office luminaire with RDB-D reflectors

Secard digital



ID 4297


Leuchten + Metall Technik GmbH

📍 Dieselstr. 5, D-91161 Hilpoltstein


🌐 <https://lmtgmbh.de>

📘 lmtgmbh

📷 lmt.gmbh



CEISY straight



CEISY curved